




aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

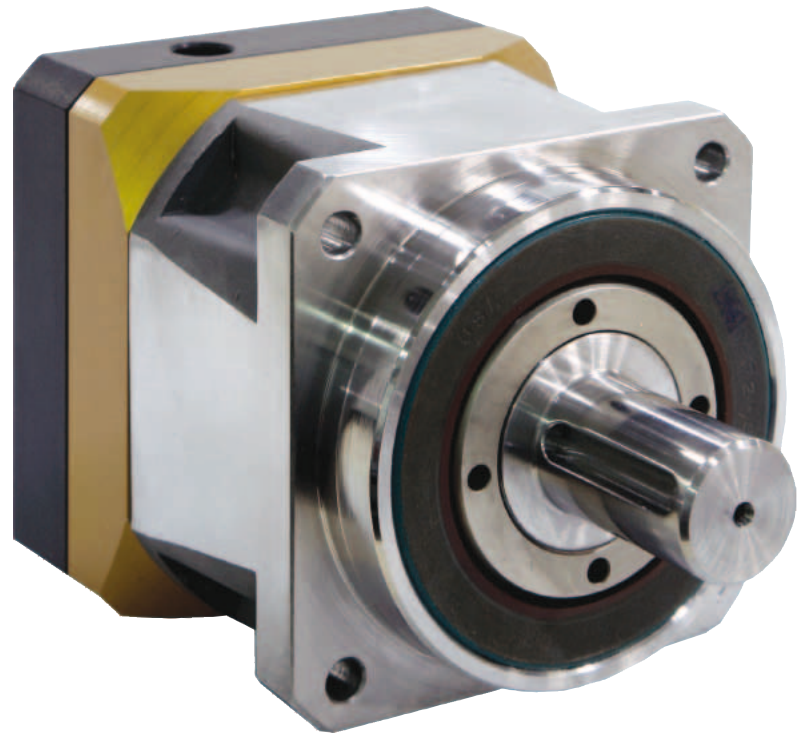

PS / RS Series

Precision Planetary Gearboxes



ENGINEERING YOUR SUCCESS.



WARNING – USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Overview 5

PS Series: In - Line Gearboxes..... 6
 Technical Characteristics 6
 Load on Input Shaft..... 7
 Dimensions 8

RS Series: Right - Angle Gearboxes 9
 Technical Characteristics 9
 Load on Input shaft 10
 Dimensions 11

**Adapter Flange / Motor - Dimensions
(Gear Unit Input Side) 12**

Gearbox Sizing 13

Order Code..... 14

Parker Hannifin

- the global leader in motion and control technologies

A world class player on a local stage

Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

Worldwide Manufacturing Locations

Europe

Littlehampton, United Kingdom
Dijon, France
Offenburg, Germany
Milan, Italy

Asia

Shanghai, China
Chennai, India

North America

Rohnert Park, California
Irwin, Pennsylvania
Wadsworth, Ohio
Charlotte, North Carolina
New Ulm, Minnesota



Offenburg, Germany

Local Manufacturing and Support in Europe

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout Europe.


For contact information, please refer to the Sales Offices on the back cover of this document or visit www.parker.com



Milan, Italy



Littlehampton, UK

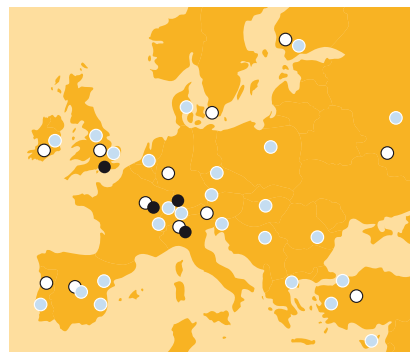

- Manufacturing
- Parker Sales Offices
- Distributors



Dijon, France

Precision Planetary Gearboxes PS / RS Series

Overview

Description

The Helical Planetary Gearboxes incorporate design enhancements to provide superior performance for the most demanding high performance applications. The PS / RS gearboxes incorporate dual angular contact bearings providing higher radial load capacities while maintaining high input speeds. The design enhancements comprise among others, needle bearings to ensure a longer lifetime. Internal design changes and optimized gearing geometries provide the basis for the universal mounting position. Common mounting kits across multiple gear head lines promote quicker deliveries and ease of mounting to any servo motor. Mounting to any servo motor is as easy as A-B-C (adapter, bushing, collet).



Features

- **Higher radial load capacity:**
Angular contact output bearings
- **Increased service life:**
Needle bearings
- **Life time lubrication**
- **Universal Mounting Kits:**
Quicker deliveries and easier mounting
- **High nominal torque and low backlash:**
Helical planetary gearing
- **High stiffness:** Integrated planetary gear head
- **High wear resistance:**
Plasma Nitriding heat treating

Technical Characteristics - Overview

Series	Unit	PS	RS
Gear geometry		Helical Planetary	Helical Planetary/ Spur Bevel
Type		In-Line	Right Angle
Frame sizes	[mm]	60...115	
Maximum input speed	[min ⁻¹]	up to 6000	
Nominal torque	[Nm]	27...230	13...220
Radial force	[N]	>7500	
Life	[h]	20 000	
Backlash	[arcmin]	up to <3	up to <4

PS Series: In - Line Gearboxes

Technical Characteristics

Parameter	Unit	Ratio ⁽⁸⁾	PS60	PS90	PS115
Nominal output torque ⁽¹⁾ $T_{nom r}$	[Nm]	3 , 15, 30	27	76	172
		4, 5 , 7, 20 , 25, 40, 50 , 70	37	110	230
		10 , 100	32	93	205
Maximum acceleration torque $T_{acc r}$	[Nm]	3 , 15, 30	34	105	225
		4, 5 , 7, 20 , 25, 40, 50 , 70	48	123	285
		10 , 100	37	112	240
Emergency stop output torque ⁽²⁾ $T_{em r}$	[Nm]	3 , 15, 30	80	260	600
		4, 5 , 7, 20 , 25, 40, 50 , 70	70	230	500
		10 , 100	60	200	430
Nominal drive speed $N_{nom r}$	[min ⁻¹]	3	3000	2500	2000
		4, 5	3500	3000	2500
		7, 10 , 15	4000	3500	3000
		20 , 25, 30	4500	4000	3500
		40, 50	4800	4400	3800
		70, 100	5200	4800	4200
Maximum input speed $N_{max r}$ ⁽³⁾	[min ⁻¹]	3...100	6000	5500	4500
Maximum radial force P_{rmax} ⁽⁴⁾	[N]		1650	4800	7500
Maximum axial load P_{amax} ⁽⁵⁾	[N]		2100	3600	6800
Life	[h]		20 000 (lifetime lubrication)		
Backlash - standard ⁽⁶⁾	[arcmin]	3...10 (1 step)	<6	<6	<4
		15...100 (2 step)	<8	<8	<6
Backlash - reduced ⁽⁶⁾	[arcmin]	3...10 (1 step)	<4	<4	<3
		15...100 (2 step)	<6	<6	<5
Efficiency at nominal torque	%	3...10	97	97	97
		15...100	94	94	94
Noise level at 3000 min⁻¹ ⁽⁷⁾	[db]	3...100	<62	<62	<65
Torsional rigidity	[Nm/arcmin]	3...100	3	12	27
Operating temperature	[°C]	3...100	-20...90		
Lubrication		3...100	per maintenance schedule		
Orientation		3...100	any		
Direction of Rotation		3...100	same as input		
Enclosure rating			IP65		
Rotor inertia			see page 8		
Weight	[kg]	3...10	1.3	3.0	7.0
		15...100	1.7	5.0	10.0

⁽¹⁾ At nominal speed $N_{nom r}$.

⁽²⁾ Maximum of 1000 stops.

⁽³⁾ Cycle mode.

⁽⁴⁾ Max. radial load applied to the center of the shaft at 100 min⁻¹

⁽⁵⁾ Max. axial load at 100 min⁻¹.

⁽⁶⁾ Measured at 2 % of rated torque.


⁽⁷⁾ Measure at 1 m.

⁽⁸⁾ Gearboxes in bold print - ratios with standard reversing play are on stock.

Load on Input Shaft


Formulas to calculate radial load (P_{rx}) at any distance "X" from the gearbox mounting surface:

PS60

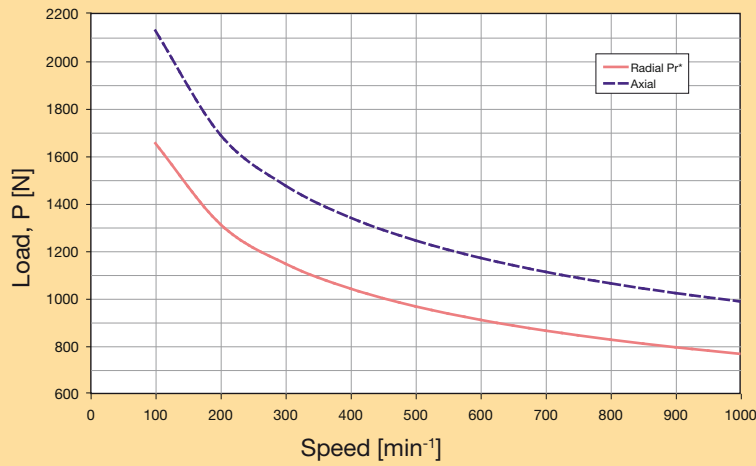


$$P_{rx} = P_r * 75 \text{ mm} / (49 \text{ mm} + X)$$

PS90

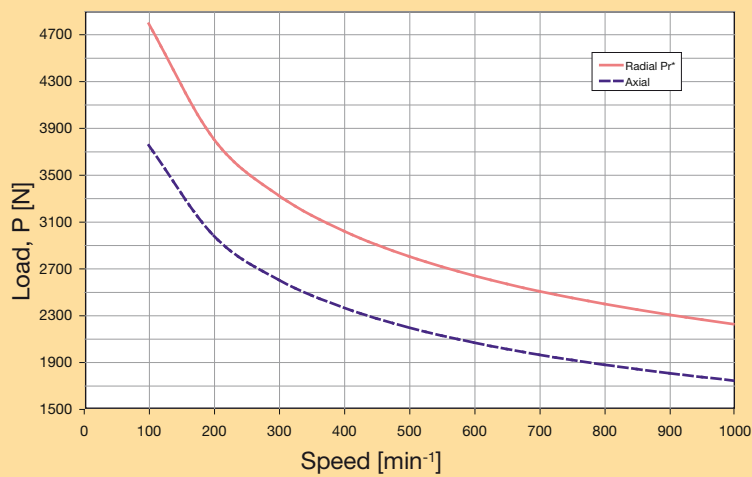

$$P_{rx} = P_r * 96 \text{ mm} / (62 \text{ mm} + X)$$



PS115

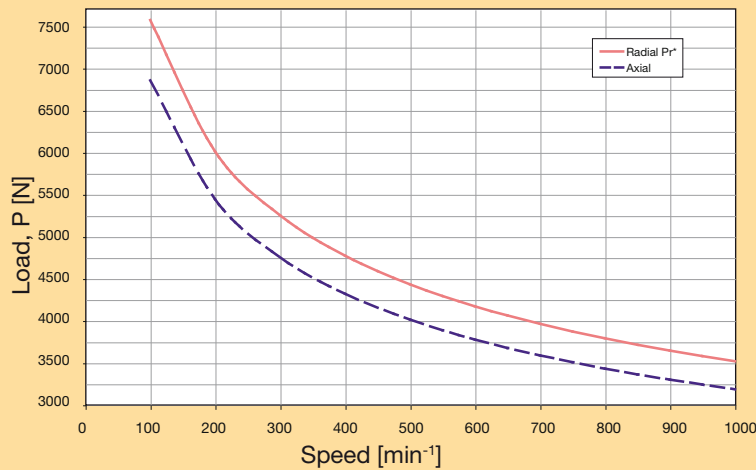

$$P_{rx} = P_r * 124 \text{ mm} / (81 \text{ mm} + X)$$

* Radial load applied to center of the shaft.

Dimensions

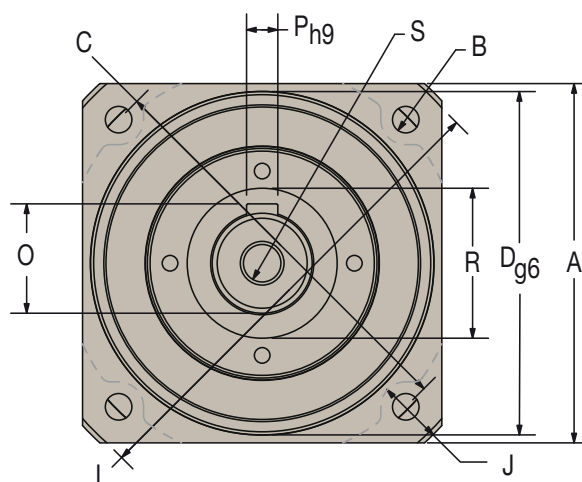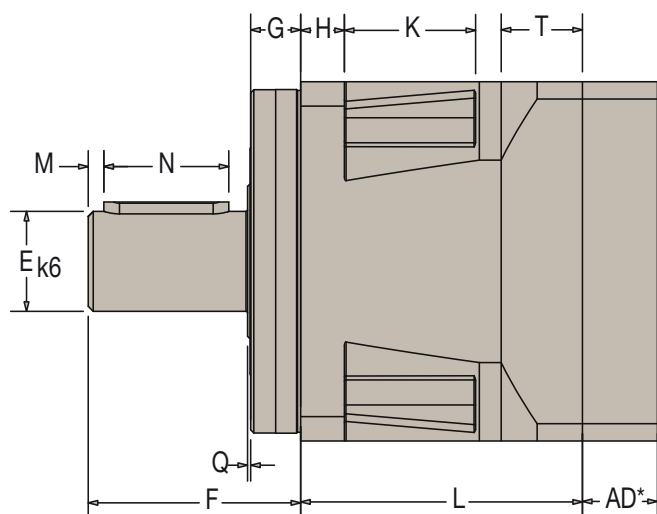

AD*: see table "Universal Mounting Kits"

Frame size	All dimensions in mm	PS60	PS90	PS115
A	Flange cross section	62	90	115
B	Fixing bore	5.5	6.5	8.5
C	Bolt circle	70	100	130
D	Motor pilot Ø	50	80	110
E	Drive shaft Ø	16	22	32
F	Drive shaft length	40	52	68
G	Motor pilot depth	11	15	16
H	Flange width	8	10	14
I	Ø Housing	80	116	152
J	Housing recess	5	6.5	7.5
K	Recess length	24	33	42
L1	Length single stage	59.8	69.5	90.2
L2	Length double stage	94.8	113	143.4
M	Distance from shaft end	2	3	5
N	Keyway length	25	32	40
O	Key height	18	24.5	35
P	Keyway width	5	6	10
Q	Collar height	1	1	1.5
R	Collar Ø	22	35	50
S	Center bore (shaft end)	M5x8	M8x16	M12x25
T	Width of flange on output side	20.5	20	26

Universal Mounting Kits

Adapter length "AD" dimension

Frame size	Motor shaft length [mm]	Gearbox adapter length [mm]
60	16...35	16.5
	35.1...41	22.5
90	20...40	20
	40.1...48	28.5
115	22...50	24
	50.1...61	35

PS: Rotor Inertia

All rotor inertias refer to the gearbox input

Ratio	Unit	PS60	PS90	PS115
3	[kgmm ²]	25	97	340
4	[kgmm ²]	17	67	220
5	[kgmm ²]	15	51	170
7	[kgmm ²]	14	41	130
10	[kgmm ²]	14	37	110
15	[kgmm ²]	15	52	170
20	[kgmm ²]	15	51	170
25	[kgmm ²]	15	51	170
30, 40, 50, 70, 100	[kgmm ²]	13	37	110

RS Series: Right - Angle Gearboxes

Technical Characteristics

Parameter	Unit	Ratio	RS60	RS90	RS115
Nominal output torque ⁽¹⁾ $T_{nom r}$	[Nm]	5	13	55	85
		10	24	80	160
		15, 20, 25, 50	35	88	220
		30, 40, 100	30	86	195
Maximum acceleration torque $T_{acc r}$	[Nm]	5	19	83	127
		10	36	120	240
		15, 20, 25, 50	45	123	255
		30, 40, 100	37	112	240
Emergency stop output torque ⁽²⁾ $T_{em r}$	[Nm]	5	40	150	270
		10	72	240	480
		15, 20, 25, 50	80	250	510
		30, 40, 100	60	200	430
Nominal drive speed $N_{nom r}$	[min ⁻¹]	5, 10	3200	2800	2400
		15, 20, 25, 30, 40	3700	3300	2900
		50, 100	4200	3800	3400
Maximum input speed $N_{max r}$ ⁽³⁾	[min ⁻¹]	5...100	6000	5300	4500
Maximum radial force $P_{r max}$ ⁽⁴⁾	[N]		1650	4800	7500
Maximum axial load $P_{a max}$ ⁽⁵⁾	[N]		2100	3600	6800
Life	[h]		20 000 (lifetime lubrication)		
Backlash - standard ⁽⁶⁾	[arcmin]	5...10 (1 step)	<14	<12	<12
		15...100 (2 step)	<12	<10	<10
Backlash - reduced ⁽⁶⁾	[arcmin]	5...10 (1 step)	<10	<8	<8
		15...100 (2 step)	<8	<6	<6
Efficiency at nominal torque	%	5...10	94	94	94
Noise level at 3000 min ⁻¹ ⁽⁷⁾	[db]	5...100	<65	<68	<68
Torsional rigidity	[Nm/arcmin]	5...100	2.5	10	22
Operating temperature	[°C]	5...100	-20...90		
Lubrication		5...100	per maintenance schedule		
Orientation		5...100	any, details see ordering information		
Direction of Rotation		3...100	Direction turns		
Enclosure rating			IP65		
Rotor inertia			see page 11		
Weight	[kg]	5...10	2.0	6.0	11.0

⁽¹⁾ At nominal speed $N_{nom r}$.

⁽²⁾ Maximum of 1000 stops.


⁽³⁾ Cycle mode.

⁽⁴⁾ Max. radial load applied to the center of the shaft at 100 min⁻¹

⁽⁵⁾ Max. axial load at 100 min⁻¹.


⁽⁶⁾ Measured at 2 % of rated torque.

⁽⁷⁾ Measure at 1 m.

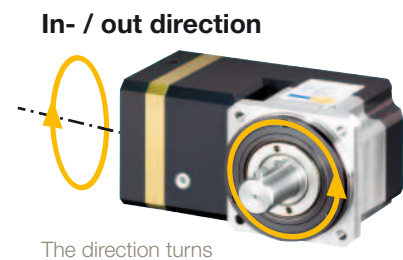

Load on Input shaft


RS60

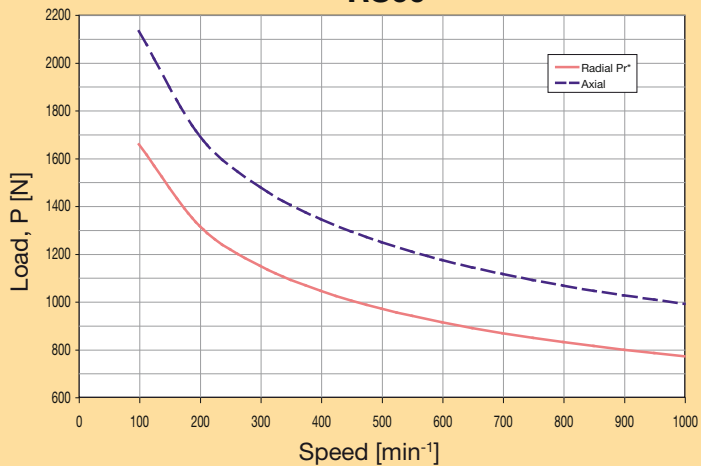

Formulas to calculate radial load (P_{rx}) at any distance "X" from the gearbox mounting surface:


$$P_{rx} = P_r * 75 \text{ mm} / (49 \text{ mm} + X)$$

RS90

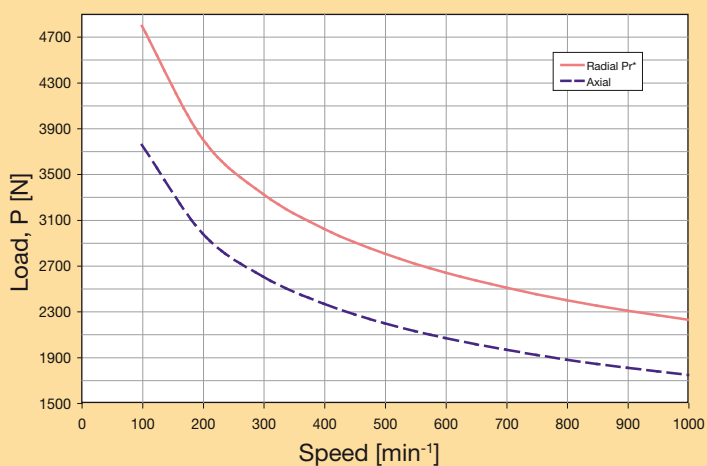

$$P_{rx} = P_r * 96 \text{ mm} / (62 \text{ mm} + X)$$



RS115

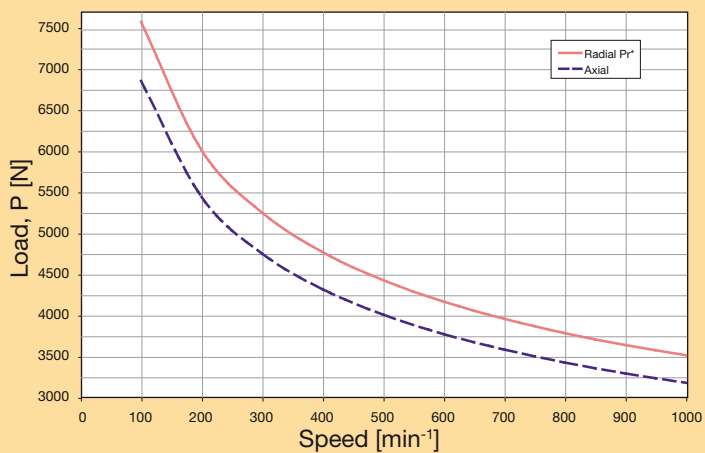

$$P_{rx} = P_r * 124 \text{ mm} / (81 \text{ mm} + X)$$

* Radial load applied to center of the shaft.

Dimensions

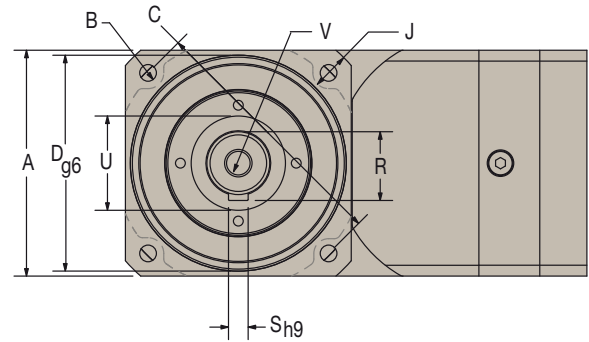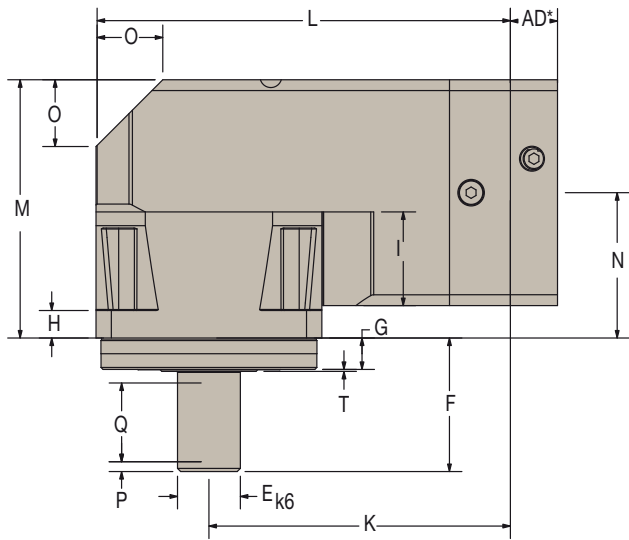

AD*: see table "Universal Mounting Kits"

Frame size	All dimensions in mm	RS60	RS90	RS115
A	Flange cross section	62	90	115
B	Mounting bore	5.5	6.5	8.5
C	Bolt circle	70	100	130
D	Motor pilot Ø	50	80	110
E	Input shaftØ	16	22	32
F	Length of input shaft	40	52	68
G	Motor pilot depth	11	15	16
H	Flange width	8	10	14
I	Enclosure recess	23.5	40.5	47.5
J	Recess length	5	6.5	7.5
K	Distance to output centerline	93.7	132	153.5
L	Housing length	124.7	177	211
M	Housing width	76.8	103	132
N	Distance to input centerline	47	58	74
O	Bevel height	14	25	32
P	Distance from shaft end	2	3	5
Q	Keyway length	25	32	40
R	Key height	18	24.5	35
S	Keyway width	5	6	10
T	Collar height	0.5	0.5	1
U	Collar Ø	22	35	45
V	Center bore (shaft end)	M5x8	M8x16	M12x25

Universal Mounting Kits

Adapter length "AD" dimension

Frame size	Motor shaft length [mm]	Gearbox adapter length [mm]
60	16...35	16.5
	35.1...41	22.5
90	20...40	20
	40.1...48	28.5
115	22...50	24
	50.1...61	35

RS: Rotor Inertia

All rotor inertias refer to the gearbox input

Ratio	Unit	RS60	RS90	RS115
5	[kgmm ²]	22	81	250
10	[kgmm ²]	19	61	190
15	[kgmm ²]	18	60	170
20	[kgmm ²]	17	51	140
25	[kgmm ²]	16	42	130
30	[kgmm ²]	18	60	170
40	[kgmm ²]	17	51	140
50	[kgmm ²]	15	40	110
100	[kgmm ²]	15	40	110


Adapter Flange / Motor - Dimensions (Gear Unit Input Side)

Dimensions [mm]

Motor ⁽¹⁾	Flange Type	Motor flange	Flange depth	Bolt circle Ø	Bore Ø	Pilot Ø	Pilot depth	Shaft Ø	Shaft length	Adapter flange		
		QF	PC	F	DF	C	S	D	L	Order No.	Fastening thread	AD ⁽²⁾ (short)
SM_60,###,##,5,11,S	B5	70	7	75	6	60	2.5	11	23	MU60-001	M5	16.5
M_70,###,##,5,11,S	B5	70	7	75	6	60	2.5	11	23	MU60-001	M5	16.5
NX3		56	8.5	75	5.5	60	2.5	11	23	MU60-001	M5	16.5
M_56,###,##,5,9,S	B5	56	6.5	63	5.5	40	2.5	9	20	MU60-003	M5	16.5
SM_60,###,##,8,9,S	B5	60	7	63	5.5	40	2.5	9	20	MU60-003	M5	16.5
SY56#	Nema23	56.5	4.83	66.67	5.3	38.1	1.6	6.35	25.4	MU60-005	M5	16.5
M_56,###,##,5,11,S	B5	56	6.5	63	5.5	40	2.5	11	23	MU60-254	M5	16.5
NX2		56	7.2-18	63	5.5	40	2.5	11	25	MU60-254	M5	16.5
NX1		42.5	6	50	3.2	30	2.5	9	25	MU60-255	M3	16.5
SM_82,###,##,8,14,S	B8	82	10	100	6.5	80	3.5	14	30	MU60-321	M6	16.5
SM_82,###,##,8,14,S	B8	82	10	100	6.5	80	3.5	14	30	MU90-001	M6	20
SM_82,###,##,8,19,S	B8	82	10	100	6.5	80	3.5	19	40	MU90-085	M6	20
NX4		91.5	10.5	100	7	80	3	19	40	MU90-085	M6	20
M_105,###,##,5,19,S	B5	105	10	115	9.5	95	3.5	19	40	MU90-088	M9	20
SM_100,###,##,5,19,S	B5	100	10	115	9	95	3.5	19	40	MU90-088	M8	20
SM_115,###,##,8,19,S	B8	115	10	130	9	95	3.5	19	40	MU90-345	M8	20
M_105,###,##,5,24,S	B5	105	10	115	9.5	95	3.5	24	50	MU115-005	M8	24
SM_100,###,##,5,24,S	B5	100	10	115	9	95	3.5	24	50	MU115-005	M8	24
SM_115,###,##,8,19,S	B8	115	10	130	9	95	3.5	19	40	MU115-006	M8	24
M_105,###,##,6,24,S	B6	105	10	130	9	110	3.5	24	50	MU115-010	M8	24
SM_115,###,##,7,24,S	B7	130	10	130	9	110	3.5	24	50	MU115-010	M8	24
NX6		121	10.5	130	9	110	3.5	24	50	MU115-010	M8	24
SM_82,###,##,8,14,S	B8	82	10	100	6.5	80	3.5	14	30	MU115-015	M6	24
SM_115,###,##,5,24,S	B5	145	10	165	11	130	3.5	24	50	MU115-026	M10	24
SM_142,###,##,5,24,S	B5	145	10	165	11	130	3.5	24	50	MU115-026	M10	24
SM_82,###,##,5,19,S	B5	100	10	115	9	95	3.5	19	40	MU115-039	M8	24
SM_100,###,##,5,19,S	B5	100	10	115	9	95	3.5	19	40	MU115-039	M8	24
SM_82,###,##,8,19,S	B8	82	10	100	6.5	80	3.5	19	40	MU115-089	M6	24
SM_115,###,##,8,24,S	B8	115	10	130	9	95	3.5	24	50	MU115-257	M8	24
M_105,###,##,9,24,S	B9	96	10	100	7	80	3.5	24	50	MU115-269	M6	24

⁽¹⁾ MB/SMB: for drives TPDM, SLVDN, TwinN, SPDN, HiDrive
MH/SMH: for drive Compax3

⁽²⁾ AD: Adapter length (please refer to the "dimensions" chapter)

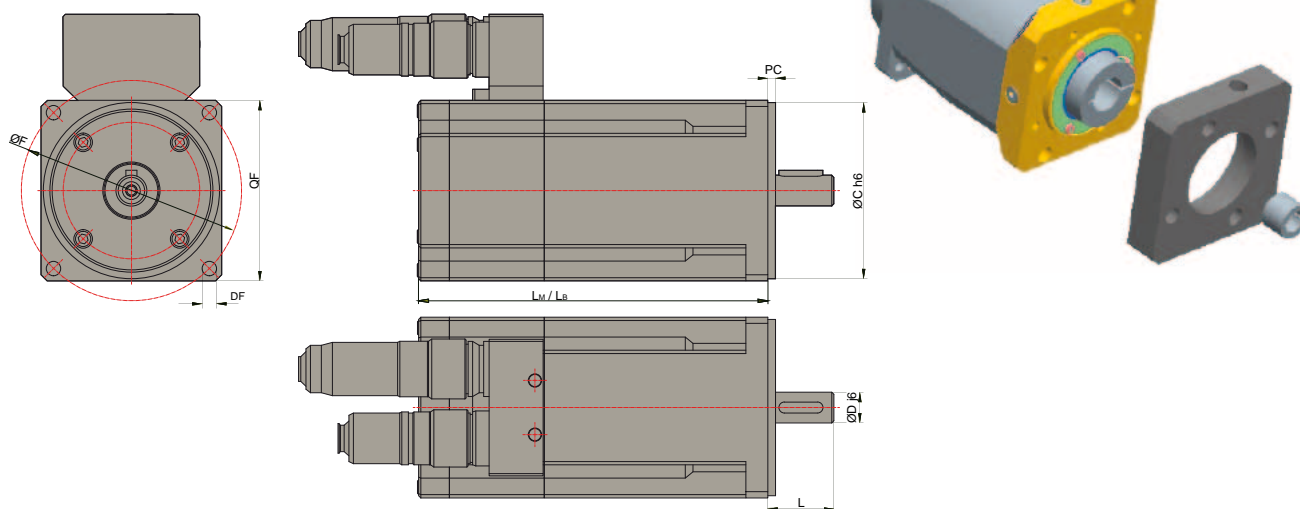

Gearbox Sizing

Parker has prepared the following procedure to provide a quick method for selecting a gearbox.

1) Application parameters:

- Acceleration time (t_{acc})
- Continuous run time (t_{cont})
- Deceleration time (t_{dec})
- Dwell time (t_{dwell})
- Acceleration torque (T_{acc})
- Continuous torque (T_{cont})
- Deceleration torque (T_{dec})


- Application speed (N_{cont})
- Transmission ratio (i)
- Gearbox nominal torque ($T_{nom r}$)
- Max. permissible acceleration torque ($T_{acc r}$)
- Percentage of acceleration torque vs. continuous cycle time (t_{total})
- Max. input speed ($N_{max r}$)

2) Duty cycle:

$$\text{Duty cycle} = t_{acc} + t_{cont} + t_{dec} / t_{total} \times 100 \%$$

If duty cycle is <60 % and ($t_{acc} + t_{cont} + t_{dec}$) is less than 20 minutes, the motion is considered to be intermittent.

If duty cycle is <60 % and ($t_{acc} + t_{cont} + t_{dec}$) is more than 20 minutes, the motion is considered to be continuous.

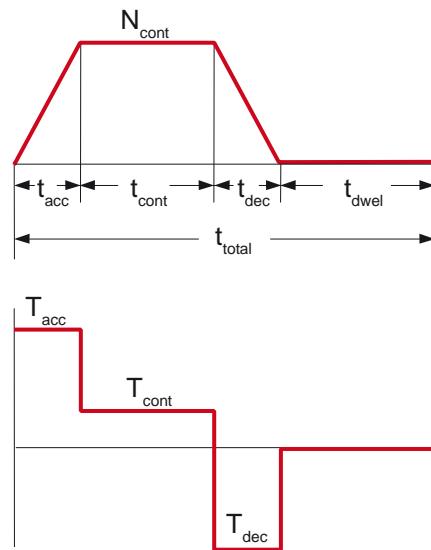

3) For Cycle mode applies:

Determine T_{acc} % of ($T_{acc} + T_{cont} + T_{dec}$):
 $T_{acc} / (T_{acc} + T_{cont} + T_{dec}) \times 100\%$

Define the ratio: T_{cont} / T_{acc}

Use the table to select the load factor K.

Compare Accel/Decel torque to the maximum permissible accel torque of the gearbox $T_{acc r}$: $T_{acc} < T_{acc r} \times K$, if not, please select a more suitable gearbox.

Compare the required maximum speed to the maximum rated speed of the gearbox.

$$N_{max} < N_{max r / i} \text{ (i-gearbox ratio)}$$

Table: Load Factor K

T_{acc} %	$0 < T_{cont} / T_{acc} < 0.25$	$0.25 < T_{cont} / T_{acc} < 0.5$
10-15	1.0	1.0
15-20	1.0	0.95
20-25	0.94	0.89
25-30	0.88	0.84
30-35	0.81	0.79
35-40	0.76	0.75
40-45	0.71	0.70
45-50	0.66	0.66

4) For continuous operation applies:

$$T_{nom} < T_{nom r}$$

$$N_{nom} < N_{nom r} / i$$

5) Check the Emergency Stop Torque Rating.

6) Verify Radial and Axial Shaft Load of the Application for the selected Gearbox.

Order Code

PS / RS Gearboxes

	1	2		3		4	5		6
Order example	PS	60	-	003	-	S	2	/	MU60-088

1 Gearbox type

- **PS** Gearbox for in-line mounting
- **RS** Right-angle gearboxes

2

- **60** Flange 60
- **90** Flange 90
- **115** Flange 1150

3 Ratio

	i	PS	RS
003	3	● x	
004	4	x	
005	5	● x	x
007	7	x	
010	10	● x	x
015	15	x	x
020	20	● x	x
025	25	x	x
030	30	x	x
040	40	x	x
050	50	● x	x
070	70	x	
100	100	x	x

4 Reverse play / orientation

- **S** Standard
- **L** Reduced

5 Series

- **2** Gen 2 Gearboxes

- **On stock, short delivery times**

6 Adapter flange / Motor assignment (Dimensions see next page)

- **MU60-001** SMH60,###,##,5,11,S
MH70,###,##,5,11,S
NX3
- **MU60-003** MH56,###,##,5,9,S
SMH60,###,##,8,9,S
- **MU60-005** SY56
- **MU60-254** MH56,###,##,5,11,S
NX2
- **MU60-255** NX1
- **MU60-321** SMH,###,###,8,14,S
- **MU90-001** SMH82,###,##,8,14,S
- **MU90-085** SMH82,###,##,8,19,S
NX4
- **MU90-088** MH105,###,##,5,19,S
SMH100,###,##,5,19,S
- **MU90-345** SMH115,###,##,8,19,S
- **MU115-005** MH105,###,##,5,24,S
SMH100,###,##,5,24,S
- **MU115-006** SMH115,###,##,8,19,S
- **MU115-010** MH105,###,##,6,24,S
SMH115,###,##,7,24,S
NX6
- **MU115-015** SMH82,###,##,8,14,S
- **MU115-026** SMH115,###,##,5,24,S
SMH142,###,##,5,24,S
- **MU115-039** SMH82,###,##,5,19,S
SMH100,###,##,5,19,S
- **MU115-089** SMH82,###,##,8,19,S
- **MU115-257** SMH115,###,##,8,24,S
- **MU115-269** MH105,###,##,9,24,S
- **MUxxx-yyy** Additional motors: Selection of the adapter flange on www.parker-eme.com/gear_kits

Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374.



AEROSPACE

Key Markets

- Aircraft engines
- Business & general aviation
- Commercial transports
- Land-based weapons systems
- Military aircraft
- Missiles & launch vehicles
- Regional transports
- Unmanned aerial vehicles

Key Products

- Flight control systems & components
- Fluid conveyance systems
- Fluid metering delivery & atomization devices
- Fuel systems & components
- Hydraulic systems & components
- Inert nitrogen generating systems
- Pneumatic systems & components
- Wheels & brakes



CLIMATE CONTROL

Key Markets

- Agriculture
- Air conditioning
- Food, beverage & dairy
- Life sciences & medical
- Precision cooling
- Processing
- Transportation

Key Products

- CO₂ controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Solenoid valves
- Thermostatic expansion valves



ELECTROMECHANICAL

Key Markets

- Aerospace
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

Key Products

- AC/DC drives & systems
- Electric actuators
- Controllers
- Gantry robots
- Gearheads
- Human machine interfaces
- Industrial PCs
- Inverters
- Linear motors, slides and stages
- Precision stages
- Stepper motors
- Servo motors, drives & controls
- Structural extrusions



FILTRATION

Key Markets

- Food & beverage
- Industrial machinery
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation
- Process
- Transportation

Key Products

- Analytical gas generators
- Compressed air & gas filters
- Condition monitoring
- Engine air, fuel & oil filtration & systems
- Hydraulic, lubrication & coolant filters
- Process, chemical, water & microfiltration filters
- Nitrogen, hydrogen & zero air generators



FLUID & GAS HANDLING

Key Markets

- Aerospace
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Mobile
- Oil & gas
- Transportation
- Welding

Key Products

- Brass fittings & valves
- Diagnostic equipment
- Fluid conveyance systems
- Industrial hose
- PTFE & PFA hose, tubing & plastic fittings
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



HYDRAULICS

Key Markets

- Aerospace
- Aerial lift
- Agriculture
- Construction machinery
- Forestry
- Industrial machinery
- Mining
- Oil & gas
- Power generation & energy
- Truck hydraulics

Key Products

- Diagnostic equipment
- Hydraulic cylinders & accumulators
- Hydraulic motors & pumps
- Hydraulic systems
- Hydraulic valves & controls
- Power take-offs
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



PNEUMATICS

Key Markets

- Aerospace
- Conveyor & material handling
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Transportation & automotive

Key Products

- Air preparation
- Compact cylinders
- Field bus valve systems
- Grippers
- Guided cylinders
- Manifolds
- Miniature fluidics
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves and controls
- Rodless cylinders
- Rotary actuators
- Tie rod cylinders
- Vacuum generators, cups & sensors



PROCESS CONTROL

Key Markets

- Chemical & refining
- Food, beverage & dairy
- Medical & dental
- Microelectronics
- Oil & gas
- Power generation

Key Products

- Analytical sample conditioning products & systems
- Fluoropolymer chemical delivery fittings, valves & pumps
- High purity gas delivery fittings, valves & regulators
- Instrumentation fittings, valves & regulators
- Medium pressure fittings & valves
- Process control manifolds



SEALING & SHIELDING

Key Markets

- Aerospace
- Chemical processing
- Consumer
- Energy, oil & gas
- Fluid power
- General industrial
- Information technology
- Life sciences
- Military
- Semiconductor
- Telecommunications
- Transportation

Key Products

- Dynamic seals
- Elastomeric o-rings
- EMI shielding
- Extruded & precision-cut, fabricated elastomeric seals
- Homogeneous & inserted elastomeric shapes
- High temperature metal seals
- Metal & plastic retained composite seals
- Thermal management



EMAC s.r.o.
Kasarenska 2404/26
911 05 Trencin
SLOVAKIA

Parker certified distributor
 +421 32 3810 232
 info@emac.sk
 www.emac.sk